

S Series

NOTHING PERFORMS
LIKE A HAUSCHILD SPEEDMIXER®

BLENDING RELIABILITY, EFFICIENCY,
ACCURACY & SAFETY BEAUTIFULLY



DAC 150.1 / 250.1

STANDARD FEATURES ON ALL DAC MACHINES

150 | 250 | 400 | 600 | 700 | 800 | 1100 | 3000 | 5000 | 10000



THE GOLD
STANDARD
IN BLADELESS
MIXING

LEGENDARY
ACCURACY &
REPEATABILITY

UNPARALLELED
QUALITY &
RELIABILITY

FAST, EFFICIENT,
VIRTUALLY
INDESTRUCTIBLE

NO
CLEANING
REQUIRED

CUSTOM
CONFIGURATIONS
& SOLUTIONS

Hauschild GmbH & Co. KG

info@hauschild-speedmixer.com
+49 (0)2381 48205 - 0
hauschild-speedmixer.com

 **Hauschild**
SpeedMixer®


THE BEAUTY OF *PRECISION*

Technical Data

Specification	DAC 150.1 FV (-K)	DAC 150.1 FVZ (-K)	DAC 250.1 FV (-K)	DAC 250.1 FVZ (-K)
Mixing Capacity Min/Max ¹ :	5g ÷ 150g	5g ÷ 150g	5g ÷ 250g	5g ÷ 250g
Speed Min/Max:	300 rpm ÷ 3500 rpm	300 rpm ÷ 3500 rpm	350 rpm ÷ 2500 rpm	350 rpm ÷ 2500 rpm
Mixing Time Min/Max:	5s ÷ 60s	5s ÷ 300s	5s ÷ 60s	5s ÷ 300s
Voltage - Frequency:	110-240 V ~ 50-60 Hz	110-240 V ~ 50-60 Hz	110-240 V ~ 50-60 Hz	110-240 V ~ 50-60 Hz
Input Power:	0,5 KW	0,5 KW	0,5 KW	0,5 KW
Height - Closed Lid:	465 mm	465 mm	465 mm	465 mm
Height - Open Lid:	630 mm	630 mm	630 mm	630 mm
Width:	280 mm	280 mm	280 mm	280 mm
Depth:	315 mm	315 mm	315 mm	315 mm
Weight:	28 kg	28 kg	28 kg	28 kg
Programmable:	2 Programs	2 Programs	2 Programs	2 Programs

¹ Including material, jar, and holder.

The Original Hauschild SpeedMixer® DAC Configurations at a Glance

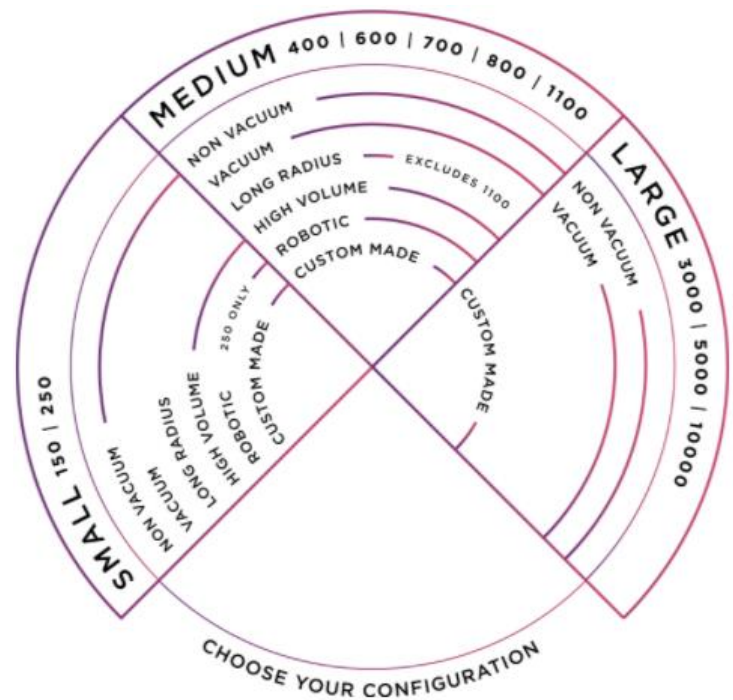

EXPERIENCE THE BEAUTY OF ACCURACY + ROI
ENGINEERED INTO EVERY HAUSCHILD SPEEDMIXER®

Hauschild GmbH & Co. KG

info@hauschild-speedmixer.com

+49 (0)2381 48205 - 0

hauschild-speedmixer.com

Hauschild
SpeedMixer®

THE BEAUTY OF PRECISION